



## APC Symmetra LX 16kVA Scalable to 16kVA N+1 Rack-mount, 220/230/240V or 380/400/415V

**Brand :** APC

**Product code:** SYA16K16RMI

**Product name :** Symmetra LX 16kVA Scalable to 16kVA N+1 Rack-mount, 220/230/240V or 380/400/415V

Symmetra LX 16kVA Scalable to 16kVA N+1 Rack-mount, 220/230/240V or 380/400/415V


[APC Symmetra LX 16kVA Scalable to 16kVA N+1 Rack-mount, 220/230/240V or 380/400/415V:](#)

High performance, redundant power protection with scalable power and runtime for space-constrained server rooms, and voice and data networks.


APC Symmetra LX 16kVA Scalable to 16kVA N+1 Rack-mount, 220/230/240V or 380/400/415V. Output power capacity: 16 kVA, Output power: 11200 W. Typical backup time at full load: 7.5 min, Typical backup time at half load: 20.3 min, Replacement battery cartridge: SYBT5. Compatibility: C-tick, CE, EN 50091-1, EN 50091-2, EN 55022 Class A, EN 55024, EN 60950, GOST, IEC 60950, VDE. Weight: 286.8 kg, Package weight: 340.4 kg. Battery type: Lead-Acid, Interface: DB-9 RS-232, Smart-Slot, Output connections: (1) Hard Wire 3-wire (H N + G) (8) IEC 320 C13 (10) IEC 320 C19



Features		Operational conditions	
Output power capacity *	16 kVA	Storage relative humidity (H-H)	0 - 95%
Output power *	11200 W	Operating altitude	0 - 3000 m
Emergency Power Off (EPO)	✓	Weight & dimensions	
Audible alarm(s)	✓	Weight	286.8 kg
Battery		Package weight	340.4 kg
Typical backup time at full load	7.5 min	Logistics data	
Typical backup time at half load	20.3 min	Harmonized System (HS) code	85078000
Replacement battery cartridge	SYBT5	Other features	
Design		I/O ports	(1) Hard Wire 3-wire (H N + G) (8) IEC 320 C13 (10) IEC 320 C19 Hard Wire 3 wire (1PH+N+G) Hard Wire 5-wire (3PH + N + G)
Compatibility	C-tick, CE, EN 50091-1, EN 50091-2, EN 55022 Class A, EN 55024, EN 60950, GOST, IEC 60950, VDE	Battery type	Lead-Acid
Operational conditions		Interface	DB-9 RS-232, Smart-Slot
Operating temperature (T-T)	0 - 40 °C	Output connections	(1) Hard Wire 3-wire (H N + G) (8) IEC 320 C13 (10) IEC 320 C19
Storage temperature (T-T)	-15 - 45 °C	Input connection type	Hard Wire 3 wire (1PH+N+G), Hard Wire 5-wire (3PH + N + G)
Operating relative humidity (H-H)	0 - 95%	Dimensions (WxDxH)	472 x 688 x 838 mm
		Output voltage note	220: 230, 240
		Nominal input voltage	230 V
		Package dimensions (WxDxH)	599 x 997 x 1054 mm

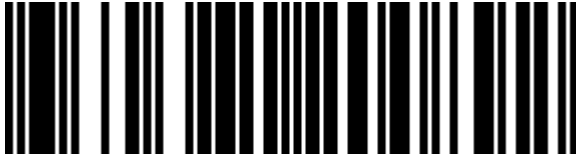

7330381200892

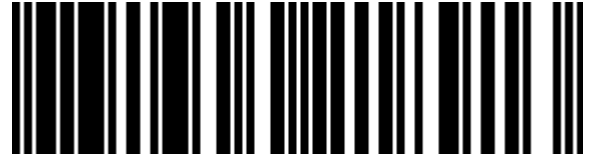

0731304218913



731304218913



8592978122362



5054444332550

Disclaimer. The information published here (the "Information") is based on sources that can be considered reliable, typically the manufacturer, but this Information is provided "AS IS" and without guarantee of correctness or completeness. The Information is only indicative and can be changed at any time without notification. No rights can be based on the Information. Suppliers or aggregators of this Information do not accept any liability with regard to the content of (web)pages and other documents, including its Information. The publisher of the Information can not be held liable for the content of 3rd party websites that are linking this Information or are linked to from this Information. You as the User of the Information are solely responsible for the choice and usage of this Information. You are not entitled to transfer, copy or otherwise multiply or distribute the Information. You are obliged to follow the directions of the copyright owner(s) with regard to the use of the Information. Exclusively Dutch law is applicable. With regard to price and stock data on the site, the publisher followed a number of starting points, which are not necessarily relevant for your private or business circumstances. Therefore, the price and stock data are only indicative and are subject to changes. You are personally responsible for the way you use and apply this information. As a user of the Information or sites or documents in which this Information is included, you will adhere to standard fair use including avoidance of spamming, ripping, intellectual-property violations, privacy violations, and any other illegal activity.