



TP-Link TL-SG1024 Hallitsematon Gigabit Ethernet (10/100/1000) 1U musta

Tuotemerkki : TP-Link

Tuotekoodi: TL-SG1024 V11

Tuotteen nimi : TL-SG1024



TP-Link TL-SG1024. Kytin tyyppi: Hallitsematon. Peruskytkentä RJ-45 Ethernet-porttien tyyppi: Gigabit Ethernet (10/100/1000), Basic kytkentä RJ-45 Ethernet-porttien määrä: 24. Täysin kaksipuolinen. MAC-osoitetaulukko: 8000 entries, Kytkentäkapasiteetti: 48 Gbit/s. Verkkostandardit: IEEE 802.3ab, IEEE 802.3i, IEEE 802.3u, IEEE 802.3x. Telineasennus, Kotelo: 1U

Management features		Design	
Switch type *	Unmanaged	LED indicators	✓
Quality of Service (QoS) support	✓	Power	
Ports & interfaces		Power source *	AC
Basic switching RJ-45 Ethernet ports quantity *	24	Power supply included *	✓
Basic switching RJ-45 Ethernet ports type *	Gigabit Ethernet (10/100/1000)	AC input voltage	100 - 240 V
Gigabit Ethernet (copper) ports quantity	24	AC input frequency	50 - 60 Hz
Network		Power consumption (max)	13.62 W
Networking standards *	IEEE 802.3ab, IEEE 802.3i, IEEE 802.3u, IEEE 802.3x	Other features	
10G support *	✗	Connectivity technology	Wired
Copper ethernet cabling technology	1000BASE-T, 100BASE-TX, 10BASE-T	Bandwidth	48 Gbit/s
Full duplex	✓	Connectivity LEDs	✓
Half duplex	✓	Dimensions (W x D x H) (imperial)	439.4 x 180.3 x 43.2 mm (17.3 x 7.1 x 1.7")
Flow control support	✓	Operational conditions	
Auto MDI/MDI-X	✓	Operating temperature (T-T)	0 - 40 °C
Auto-negotiation	✓	Storage temperature (T-T)	-40 - 70 °C
Data transmission		Operating relative humidity (H-H)	10 - 90%
Supported data transfer rates	10/100/1000 Mbps	Storage relative humidity (H-H)	5 - 90%
Switching capacity *	48 Gbit/s	Operating temperature (T-T)	32 - 104 °F
Forwarding rate	35.7 Mpps	Heat dissipation	46.44 BTU/h
MAC address table *	8000 entries	Weight & dimensions	
Store-and-forward	✓	Width	440 mm
Maximum data transfer rate	1 Gbit/s	Depth	180 mm
Jumbo frames support	✓	Height	44 mm
Jumbo frames	10000	Packaging content	
Protocols		Cables included	AC
Supported network protocols	CSMA/CD, TCP/IP	User guide	✓
		Rack mount kit	✓
		Packaging data	
		Package width	250 mm
		Package depth	528 mm

Design


Rack mounting *	✓
Form factor	1U
Product colour	Black

Packaging data

Package height	80 mm
Package weight	2.13 kg

Certificates

Certification	FCC, CE, RoHS
---------------	---------------

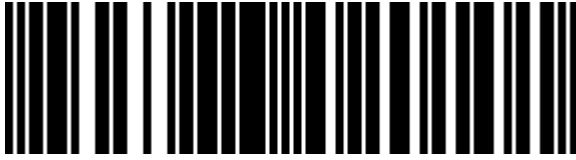


0845973020101



845973020101



3548383171414

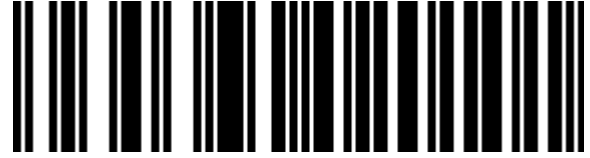

6935364020101

Disclaimer. The information published here (the "Information") is based on sources that can be considered reliable, typically the manufacturer, but this Information is provided "AS IS" and without guarantee of correctness or completeness. The Information is only indicative and can be changed at any time without notification. No rights can be based on the Information. Suppliers or aggregators of this Information do not accept any liability with regard to the content of (web)pages and other documents, including its Information. The publisher of the Information can not be held liable for the content of 3rd party websites that are linking this Information or are linked to from this Information. You as the User of the Information are solely responsible for the choice and usage of this Information. You are not entitled to transfer, copy or otherwise multiply or distribute the Information. You are obliged to follow the directions of the copyright owner(s) with regard to the use of the Information. Exclusively Dutch law is applicable. With regard to price and stock data on the site, the publisher followed a number of starting points, which are not necessarily relevant for your private or business circumstances. Therefore, the price and stock data are only indicative and are subject to changes. You are personally responsible for the way you use and apply this information. As a user of the Information or sites or documents in which this Information is included, you will adhere to standard fair use including avoidance of spamming, ripping, intellectual-property violations, privacy violations, and any other illegal activity.