



APC GVSUPS15KB2HS uninterruptible power supply (UPS) Double-conversion (Online) 15 kVA 15000 W

Brand : APC

Product code: GVSUPS15KB2HS

Product name : GVSUPS15KB2HS

15 kVA, 15 kW, 40/70Hz, 65 dB, 333x847x1485mm, 245kg

[APC GVSUPS15KB2HS uninterruptible power supply \(UPS\) Double-conversion \(Online\) 15 kVA 15000 W:](#)


GVSUPS15KB2HS Features

- Galaxy VS UPS 15kW 400V, 1 internal 7Ah smart modular battery string, expandable to 2, Start-up 5x8
- Highly efficient, easy-to-deploy 15kW, 400V 3-phase UPS that brings best-in-class power protection and low total cost of ownership to edge, small and medium data centers, as well as to critical infrastructure in commercial and industrial applications. Includes 5x8 start-up service and 1 smart modular battery string, expandable to 2 strings for extended runtime. Runtime charts available in the Documents tab.
- Includes: Battery modules ship installed, Dust filter, EcoStruxure Ready ((UPS)), Installation guide, Integrated network management, Power modules ship installed, Start-Up Service



| Features | | Battery | |
|--|----------------------------|------------------------------------|---|
| UPS topology * | Double-conversion (Online) | Battery voltage | 480 V |
| Output power capacity * | 15 kVA | Design | |
| Output power * | 15000 W | Form factor * | Tower |
| Waveform * | Sine | Product colour * | White |
| Input operation voltage (min) * | 340 V | Display type | LCD |
| Input operation voltage (max) * | 460 V | International Protection (IP) code | IP20 |
| Input frequency * | 40/70 Hz | Certification | CSA C22.2 NO. 107.3, EN/IEC 62040-1, EN/IEC 62040-2, EN/IEC 62040-3, IEC 60721-4-2 Level 2M2, UL 1778 5th edition |
| Output operation voltage (min) | 380 V | Operational conditions | |
| Output operation voltage (max) | 415 V | Operating temperature (T-T) | 0 - 40 °C |
| Output frequency | 50/60 Hz | Storage temperature (T-T) | -15 - 40 °C |
| Maximum current | 27 A | Operating relative humidity (H-H) | 0 - 95% |
| Number of input phases | 3 | Storage relative humidity (H-H) | 10 - 80% |
| Number of output phases | 3 | Operating altitude | 0 - 1000 m |
| Input power factor | 0.99 | Non-operating altitude | 0 - 3000 m |
| Crest factor | 2.5:1 | Weight & dimensions | |
| ECO mode | ✓ | Width | 333 mm |
| Output voltage Total Harmonic Distortion (THD) | 3% | Depth | 847 mm |
| Input current Total Harmonic Distortion (THD) | 3% | Height | 1485 mm |
| Noise level | 65 dB | Weight | 245 kg |
| Power protection features | Overload, Short circuit | Package width | 640 mm |
| Audible alarm(s) | ✓ | | |

| Ports & interfaces | | Weight & dimensions | |
|--------------------|--|-----------------------------|----------|
| AC outlet types | Hard Wire 3-wire (3PH + G), Hard Wire 5-wire (3PH + N + G) | Package depth | 990 mm |
| SmartSlot | ✓ | Package height | 1690 mm |
| | | Package weight | 270 kg |
| Battery | | Packaging data | |
| Battery technology | Sealed Lead Acid (VRLA) | Quick installation guide | ✓ |
| | | Logistics data | |
| | | Harmonized System (HS) code | 85078000 |

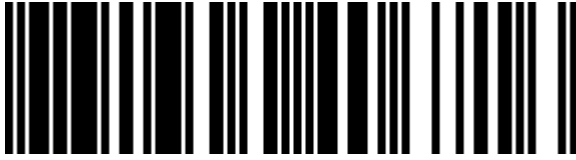

0731304406716



731304406716

Disclaimer. The information published here (the "Information") is based on sources that can be considered reliable, typically the manufacturer, but this Information is provided "AS IS" and without guarantee of correctness or completeness. The Information is only indicative and can be changed at any time without notification. No rights can be based on the Information. Suppliers or aggregators of this Information do not accept any liability with regard to the content of (web)pages and other documents, including its Information. The publisher of the Information can not be held liable for the content of 3rd party websites that are linking this Information or are linked to from this Information. You as the User of the Information are solely responsible for the choice and usage of this Information. You are not entitled to transfer, copy or otherwise multiply or distribute the Information. You are obliged to follow the directions of the copyright owner(s) with regard to the use of the Information. Exclusively Dutch law is applicable. With regard to price and stock data on the site, the publisher followed a number of starting points, which are not necessarily relevant for your private or business circumstances. Therefore, the price and stock data are only indicative and are subject to changes. You are personally responsible for the way you use and apply this information. As a user of the Information or sites or documents in which this Information is included, you will adhere to standard fair use including avoidance of spamming, ripping, intellectual-property violations, privacy violations, and any other illegal activity.