



## APC BX1600MI UPS-virtalähde Linjainteraktiivinen 1,6 kVA 900 W 6 AC-pistorasia(a)

**Tuotemerkki :** APC

**Tuotekoodi:** BX1600MI

**Tuotteen nimi :** BX1600MI


APC BX1600MI. UPS topologia: Linjainteraktiivinen, Kokonaislähtöteho (VA): 1,6 kVA, Lähtöteho: 900 W. Pistorasian tyypit: C13 liitin, Virtapistoke: C13 liitin, Ulostulojen määrä: 6 AC-pistorasia(a).

Akkuteknologia: Sealed Lead Acid (VRLA), Tyypillinen varmuuskopioaika täydellä kuormituksella: 1 min, Tyypillinen varmuuskopioaika puolikkaalla kuormituksella: 6,5 min. Kotelo: Kompakti, Tuotteen väri: musta, Johdon pituus: 1,2 m. Tuotteen leveys: 140 mm, Tuotteen syvyys: 390 mm, Tuotteen korkeus: 190 mm



Features		Battery	
UPS topology *	Line-Interactive	Typical backup time at half load	6.5 min
Output power capacity *	1.6 kVA	Battery life (max)	2 year(s)
Output power *	900 W	Battery recharge time	8 h
Waveform *	Sine	Design	
Input operation voltage (min) *	140 V	Form factor *	Compact
Input operation voltage (max) *	300 V	Cable length	1.2 m
Input frequency *	50/60 Hz	Built-in fan	✓
Output operation voltage (min)	230 V	Product colour *	Black
Output operation voltage (max)	230 V	LED indicators	✓
Output frequency	50/60 Hz	International Protection (IP) code	IP20
Output frequency regulation	0.5 Hz	Certification	CB Meet EN62040-1 / CE / IEC-62040-1 / IEC-62040-2
Output voltage regulation	10%	Operational conditions	
Automatic Voltage Regulation (AVR) ✓		Operating temperature (T-T)	0 - 40 °C
Surge energy rating	273 J	Storage temperature (T-T)	-15 - 40 °C
Response time	6 ms	Operating relative humidity (H-H)	0 - 95%
Input power factor	0.56	Operating altitude	0 - 3000 m
Noise level	40 dB	Technical details	
Audible alarm(s) ✓		Compliance certificates	RoHS
Audible alarm modes	Low battery alarm	Weight & dimensions	
Ports & interfaces		Width	140 mm
AC outlet types	C13 coupler	Depth	390 mm
Power plug	C13 coupler	Height	190 mm
AC outlets quantity	6 AC outlet(s)	Weight	10.3 kg
USB port ✓		Package width	140 mm
USB 2.0 ports quantity	1	Package depth	390 mm
USB port type	USB Type-B	Package height	190 mm
Ethernet LAN (RJ-45) ports	2		

Battery		Weight & dimensions	
Battery technology	Sealed Lead Acid (VRLA)	Package weight	11.3 kg
Typical backup time at full load	1 min	Packaging data	
		Cables included	Input power cable
		Manual	✓
		Logistics data	
		Harmonized System (HS) code	85078000

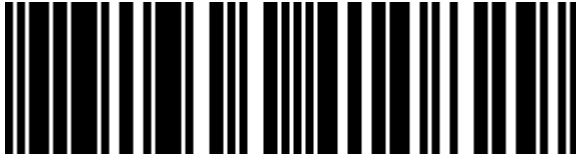

0731304410829



731304410829

Disclaimer. The information published here (the "Information") is based on sources that can be considered reliable, typically the manufacturer, but this Information is provided "AS IS" and without guarantee of correctness or completeness. The Information is only indicative and can be changed at any time without notification. No rights can be based on the Information. Suppliers or aggregators of this Information do not accept any liability with regard to the content of (web)pages and other documents, including its Information. The publisher of the Information can not be held liable for the content of 3rd party websites that are linking this Information or are linked to from this Information. You as the User of the Information are solely responsible for the choice and usage of this Information. You are not entitled to transfer, copy or otherwise multiply or distribute the Information. You are obliged to follow the directions of the copyright owner(s) with regard to the use of the Information. Exclusively Dutch law is applicable. With regard to price and stock data on the site, the publisher followed a number of starting points, which are not necessarily relevant for your private or business circumstances. Therefore, the price and stock data are only indicative and are subject to changes. You are personally responsible for the way you use and apply this information. As a user of the Information or sites or documents in which this Information is included, you will adhere to standard fair use including avoidance of spamming, ripping, intellectual-property violations, privacy violations, and any other illegal activity.