



Lenovo 4XB7A13633 internal solid state drive 240 GB 2.5" Serial ATA III 3D TLC NAND



Brand : Lenovo

Product code: 4XB7A13633


Product name : 4XB7A13633

- Industry-standard 2.5-inch or 3.5-inch form factors
- Cost-effective Intel 3D NAND TLC Flash Memory
- Endurance of 3 drive writes per day (DWPD) for 5 years, using Intel High Endurance Technology (HET)
- SATA TLC solid-state drive with high read performance and consistently low latencies to fulfill client needs in the enterprise space
- High reliability and enhanced ruggedness
- Energy savings, with typical write power consumption as low as 2.4 W per drive
- Absence of moving parts to reduce potential failure points in the server
- S.M.A.R.T. support
- Advanced Encrypting Standard (AES) 256-bit encryption
- Full end-to-end data path protection
- Thermal throttling to extend the life of the drive
- Enhanced power loss data protection

ThinkSystem 2.5" Intel S4610 240GB Mainstream SATA 6Gb Hot Swap SSD

Lenovo 4XB7A13633. SSD capacity: 240 GB, SSD form factor: 2.5", Read speed: 560 MB/s, Write speed: 320 MB/s, Data transfer rate: 6 Gbit/s, Component for: Server/workstation

Features		Features	
Security algorithms	256-bit AES	TBW rating	1400
SSD capacity *	240 GB	Certification	FCC, CA/CSA-CEI/IEC, EN 55024, EN 55022, EN-60950-1, UL/CSA, C-Tick, BSMI, KCC, WEEE
SSD form factor *	2.5"	Power	
Interface *	Serial ATA III	Power consumption (average)	2.4 W
NVMe *	✗	Weight & dimensions	
Memory type *	3D TLC NAND	Weight	63 g
Component for *	Server/workstation	Operational conditions	
Hardware encryption *	✓	Operating temperature (T-T)	0 - 70 °C
Data transfer rate	6 Gbit/s	Storage temperature (T-T)	-55 - 95 °C
Read speed	560 MB/s	Operating relative humidity (H-H)	5 - 95%
Write speed	320 MB/s	Storage relative humidity (H-H)	5 - 95%
Random read (4KB)	92000 IOPS	Operating vibration	2.17 G
Random write (4KB)	28000 IOPS	Non-operating vibration	3.13 G
Read latency	36 µs	Operating shock	1000 G
Write latency	37 µs	Maximum operating altitude	3050 m
S.M.A.R.T. support	✓	Other features	
Hot-swap	✓	Compliance certificates	RoHS
End-to-End Data Protection	✓	Logistics data	
Uncorrectable Bit Error Rate (UBER)	< 1 per 10 ¹⁷ bits read	Harmonized System (HS) code	84717070
Mean time between failures (MTBF)	2000000 h		

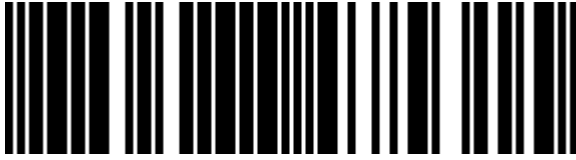

0889488475315



889488475315

Disclaimer. The information published here (the "Information") is based on sources that can be considered reliable, typically the manufacturer, but this Information is provided "AS IS" and without guarantee of correctness or completeness. The Information is only indicative and can be changed at any time without notification. No rights can be based on the Information. Suppliers or aggregators of this Information do not accept any liability with regard to the content of (web)pages and other documents, including its Information. The publisher of the Information can not be held liable for the content of 3rd party websites that are linking this Information or are linked to from this Information. You as the User of the Information are solely responsible for the choice and usage of this Information. You are not entitled to transfer, copy or otherwise multiply or distribute the Information. You are obliged to follow the directions of the copyright owner(s) with regard to the use of the Information. Exclusively Dutch law is applicable. With regard to price and stock data on the site, the publisher followed a number of starting points, which are not necessarily relevant for your private or business circumstances. Therefore, the price and stock data are only indicative and are subject to changes. You are personally responsible for the way you use and apply this information. As a user of the Information or sites or documents in which this Information is included, you will adhere to standard fair use including avoidance of spamming, ripping, intellectual-property violations, privacy violations, and any other illegal activity.