



## Lenovo 4XB7A17104 internal solid state drive 3.84 TB 2.5" Serial ATA III 3D TLC NAND



**Brand :** Lenovo

**Product code:** 4XB7A17104

**Product name :** 4XB7A17104

ThinkSystem 2.5" S4520 3.84TB Read Intensive SATA 6Gb HS SSD


[Lenovo 4XB7A17104 internal solid state drive 3.84 TB 2.5" Serial ATA III 3D TLC NAND:](#)

The ThinkSystem S4520 Read Intensive SATA SSDs use 144-layer Intel 3D NAND TLC Flash Memory technology with a 6Gbps SATA interface to provide an affordable solution with industry leading performance.

Compared with the S4510 series, these new Read Intensive (Entry) drives offer improved endurance. The S4520 SSDs are optimized for read-intensive applications such as boot, web servers, lower data rate operational databases and analytics.

Lenovo 4XB7A17104. SSD capacity: 3.84 TB, SSD form factor: 2.5", Data transfer rate: 6 Gbit/s, Component for: Server/workstation

Features		Features	
Security algorithms	256-bit AES	Certification	FCC Title 47, Part 15B, Class B
SSD capacity *	3.84 TB		EN-55035:2017 EN-55022:2006
SSD form factor *	2.5"		EN-55032:2012 Low Voltage
Interface *	Serial ATA III		Directive (LVD) 2014/35/EU EMC
Memory type *	3D TLC NAND		Directive 2014/30/EU RoHS
Component for *	Server/workstation		Directive 2011/65/EU WEEE
Hardware encryption *	✓		Directive 2012/19/EU UL 60950-1,
Data transfer rate	6 Gbit/s		2nd Edition, 2014-10-14 CSA C22.2
Random read (4KB)	92000 IOPS		No. 60950-1-07, 2nd Edition,
Random write (4KB)	31000 IOPS		2014-010 UL/CSA 62368-1, 2nd
Read latency	37 µs		Edition AS/NZ CISPR 32:2015 AS/NZ
Write latency	40 µs		CISPR 22:2009 +A1:2010 Taiwan
S.M.A.R.T. support	✓		BSMI EMC standard CNS 13438
Hot-swap	✓	Korea KCC Article 11.1 Morocco	
Mean time between failures (MTBF)	2000000 h	Decree # 2574-14 (EMC) Canada	
		ICES-003 Japan VCCI China EFUP	
		Power	
		Power consumption (write)	3.5 W
		Weight & dimensions	
		Width	70 mm
		Depth	100 mm
		Height	7 mm
		Weight	70 g
		Packaging data	
		Package width	174 mm
		Package depth	133 mm
		Package height	63 mm
		Package weight	434 g
		Operational conditions	
		Operating temperature (T-T)	0 - 70 °C
		Operating relative humidity (H-H)	5 - 95%
		Operating vibration	2.17 G
		Operating shock	1000 G
		Non-operating shock	1000 G
		Maximum operating altitude	3050 m
		Logistics data	
		Harmonized System (HS) code	84717070

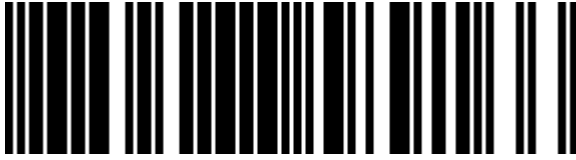

0889488589166



889488589166

Disclaimer. The information published here (the "Information") is based on sources that can be considered reliable, typically the manufacturer, but this Information is provided "AS IS" and without guarantee of correctness or completeness. The Information is only indicative and can be changed at any time without notification. No rights can be based on the Information. Suppliers or aggregators of this Information do not accept any liability with regard to the content of (web)pages and other documents, including its Information. The publisher of the Information can not be held liable for the content of 3rd party websites that are linking this Information or are linked to from this Information. You as the User of the Information are solely responsible for the choice and usage of this Information. You are not entitled to transfer, copy or otherwise multiply or distribute the Information. You are obliged to follow the directions of the copyright owner(s) with regard to the use of the Information. Exclusively Dutch law is applicable. With regard to price and stock data on the site, the publisher followed a number of starting points, which are not necessarily relevant for your private or business circumstances. Therefore, the price and stock data are only indicative and are subject to changes. You are personally responsible for the way you use and apply this information. As a user of the Information or sites or documents in which this Information is included, you will adhere to standard fair use including avoidance of spamming, ripping, intellectual-property violations, privacy violations, and any other illegal activity.

Publication date: 05-NOV-2024. Prints or copies of Information are only valid on the printed Publication date