



## BenQ LW730 dataprojektori Vakioprojektori 4200 ANSI lumenia DLP WXGA (1280x800) 3D Valkoinen

**Tuotemerkki :** BenQ

**Tuotekoodi:** 9H.JRM77.15E

**Tuotteen nimi :** LW730




BenQ LW730. Projektorin kirkkaus: 4200 ANSI lumenia, Projektioteknologia: DLP, Projektorin oletusresoluutio: WXGA (1280x800). Valonlähteen tyyppi: LED, Valonlähteen käyttöikä: 20000 h, Valonlähteen käyttöikä (säästötila): 30000 h. Zoomaussuhde: 1.2:1, Heittosuhde: 1.37~1.64, Siirtymä: 89,5%. Tuetut grafiikan erottelutarkkuudet: 640 x 480 (VGA), 1920 x 1080 (HD 1080). Sarjaliitännän tyyppi: RS-232, HDMI-versio: 1.4b



Projector		Features	
Projector brightness *	4200 ANSI lumens	Noise level (economic mode)	28 dB
Projection technology *	DLP	On Screen Display (OSD)	✓
Projector native resolution *	WXGA (1280x800)	Number of OSD languages	30
Contrast ratio (typical) *	500000:1	Noise level *	33 dB
Native aspect ratio *	16:10	High Dynamic Range (HDR) supported	✓
Number of colours	1.07 billion colours	High Dynamic Range (HDR) technology	High Dynamic Range 10 (HDR10), Hybrid Log-Gamma (HLG)
Horizontal scan range	15 - 102 kHz		
Vertical scan range	23 - 120 Hz		
Keystone correction, horizontal	-40 - 40°		
Keystone correction, vertical	-40 - 40°		
Light source		Multimedia	
Light source type *	LED	Built-in speaker(s) *	✓
Service life of light source *	20000 h	RMS rated power	10 W
Service life of light source (economic mode)	30000 h	Number of built-in speakers	1
Lamps quantity	4 lamp(s)		
Lens system		Design	
Zoom ratio	1.2:1	Market positioning *	Business
Throw ratio	1.37~1.64	Product type *	Standard throw projector
Offset	89.5%	Product colour *	White
Video		Display	
Full HD *	✓	Built-in display *	✗
3D *	✓		
Supported graphics resolutions	640 x 480 (VGA), 1920 x 1080 (HD 1080)		
Ports & interfaces		Power	
HDMI version	1.4b	Power source *	AC
		Power consumption (typical) *	365 W
		Power consumption (standby) *	0.5 W
		AC input voltage	100 - 240 V
		AC input frequency	50 - 60 Hz
		Operational conditions	
		Operating temperature (T-T)	0 - 40 °C

Ports & interfaces		Weight & dimensions	
USB 2.0 ports quantity	1	Width	420 mm
Headphone outputs	1	Depth	286.7 mm
Serial interface type *	RS-232	Height	131.7 mm
HDMI ports quantity *	1	Weight *	5.3 kg
Storage		Packaging content	
Card reader integrated *	✘	Remote control included *	✔
		Cables included	AC

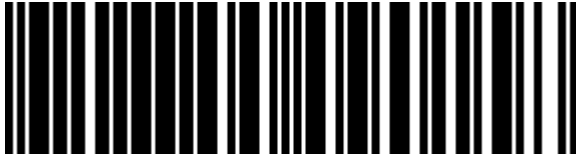

4718755090158

Disclaimer. The information published here (the "Information") is based on sources that can be considered reliable, typically the manufacturer, but this Information is provided "AS IS" and without guarantee of correctness or completeness. The Information is only indicative and can be changed at any time without notification. No rights can be based on the Information. Suppliers or aggregators of this Information do not accept any liability with regard to the content of (web)pages and other documents, including its Information. The publisher of the Information can not be held liable for the content of 3rd party websites that are linking this Information or are linked to from this Information. You as the User of the Information are solely responsible for the choice and usage of this Information. You are not entitled to transfer, copy or otherwise multiply or distribute the Information. You are obliged to follow the directions of the copyright owner(s) with regard to the use of the Information. Exclusively Dutch law is applicable. With regard to price and stock data on the site, the publisher followed a number of starting points, which are not necessarily relevant for your private or business circumstances. Therefore, the price and stock data are only indicative and are subject to changes. You are personally responsible for the way you use and apply this information. As a user of the Information or sites or documents in which this Information is included, you will adhere to standard fair use including avoidance of spamming, ripping, intellectual-property violations, privacy violations, and any other illegal activity.

Publication date: 31-DEC-2024. Prints or copies of Information are only valid on the printed Publication date