

# PRODUCT DATASHEET

## FLOODLIGHT 20 W 3000 K IP65 WT

FLOODLIGHT 20 | Floodlight with symmetrical light output with 20 W



### Areas of application

- Replacement for floodlights with halogen lamps
- Car parks and underpasses
- Public areas
- Building facades
- Construction areas
- D-sign according to EN 60598-2-24 for fire-risk commercial unit, f. e. by accumulation of dust

### Product benefits

- Frosted cover made of tempered glass for uniform illumination
- Optimized weight and size due to compact design
- No upper light output ratio (ULOR 0%) when mounted at 0° tilt
- Energy savings of up to 90 % compared to halogen lamp floodlights
- 3 years guarantee

### Product features

- Luminaire efficacy: up to 110 lm/W
- Symmetrical beam angle: 100° x 100°
- Mounting bracket for up to 180° tilting
- Type of protection: IP65
- Impact resistance: IK07
- Ambient temperature in operation: -20...+50 °C
- Connection via 1 m cable, wiring required




---

**TECHNICAL DATA****Electrical data**


Nominal wattage	20.00 W
Nominal voltage	220...240 V
Mains frequency	50...60 Hz
Nominal current	96 mA
Inrush current	19 A
Max. no. of lum. on circuit break. B16 A	83
Max. no. of lum. on circuit break. C10 A	66
Max. no. of lum. on circuit break. C16 A	106
Power factor $\lambda$	> 0.90
Total harmonic distortion	< 25 %
Protection class	I
Operating mode	Integrated LED driver

**Photometrical data**

Luminous flux	2100 lm
Luminous efficacy	105 lm/W
Color temperature	3000 K
Light color (designation)	Warm White
Color rendering index Ra	$\geq 80$
Standard deviation of color matching	$\leq 5$ sdcM
Photobiological safety group acc. to EN62778	RG1
Photobiological safety group acc. to EN62471	RG0
Beam angle	100 ° x 100 °

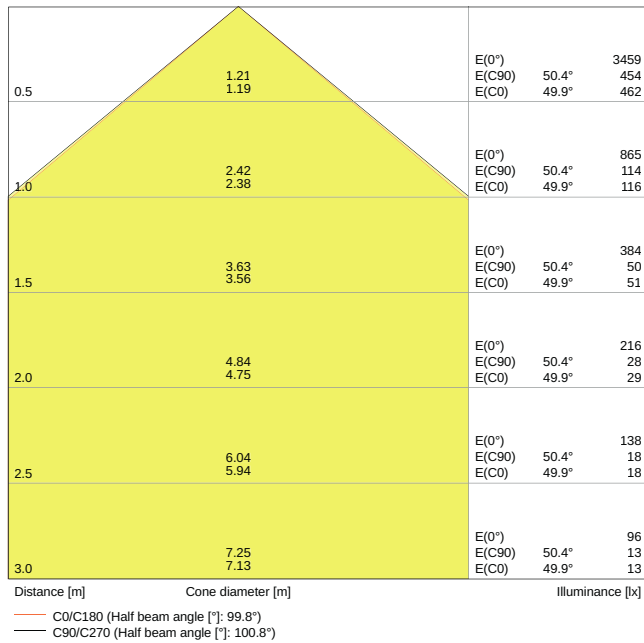


LDC typ cone

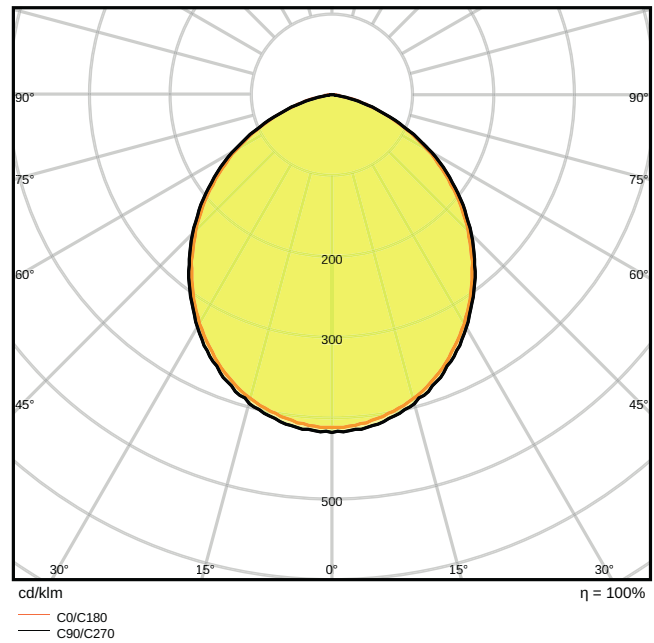

LDC typ polar

### Dimensions & Weight

Length	130.00 mm
Width	140.00 mm
Height	41.00 mm
Product weight	560.00 g
Cable length	1000 mm



### Materials & Colors

Product color	White
Housing color	White
Body material	Aluminum Polycarbonate (PC)
Cover material	Tempered glass
Light emitting surface material	Glass
Glow Wire Test according to IEC 60695-2-12	650 °C
Mercury content	0.0 mg

### Application & Mounting

Ambient temperature range	-20...+50 °C
Type of connection	Cable, 3-pole
Type of protection	IP65
Protection class IK (shock resistance)	IK07
Dimmable	No
Mounting type	Surface
Mounting location	Wall / Ceiling / Floor
Adjustable	Yes
LED module replaceable	Not replaceable



### Lifespan













Lifespan L70/B50 at 25 °C	50000 h
Lifespan L80/B10 at 25 °C	30000 h
Lifespan L90/B10 at 25 °C	15000 h
Number of switching cycles	100000

### Certificates & Standards

Standards	CE / CB / TÜV SÜD / EAC / RoHS
Luminaire with limited surface temperature, "D sign"	Yes
Ball shot safe	No

### DOWNLOAD DATA

DOWNLOAD DATA	
	User instruction FLOODLIGHT 100DEG
	User instruction User Instruction Floodlight LED 100 DEG




DOWNLOAD DATA	
	PRODUCT DATASHEET FLOODLIGHT LED 20 W 3000 K WT
	Tender documents Tender Text 4058075097469
	Certificates Floodlight 100 DEG CE Certificate
	Declarations of conformity EU Declaration of Conformity Floodlight 100DEG LEDV
	Declarations of conformity Attestation of Conformity Floodlight 100DEG TÜV
	On-Pack-Info Legal Insert Floodlight 100 DEG
	IES file (IES) Flood LED Sym 20W 3000K WT IP65
	LDT file (Eulumdat) Flood LED Sym 20W 3000K WT IP65
	R3D file (Relux 3D Model) Floodlight 20w
	M4D file (3D Model with rotation axis) Floodlight_20W
	ULD file (DIALux) FLOODLIGHT2020W3000KIP65WT
	UGR file (UGR table) Flood LED Sym 20W 3000K WT IP65

### LOGISTICAL DATA

Product code	Packaging unit (Pieces/Unit)	Dimensions (length x width x height)	Gross weight	Volume
4058075097469	Folding box 1	46 mm x 146 mm x 197 mm	611.00 g	1.32 dm <sup>3</sup>
4058075097476	Shipping box 10	309 mm x 255 mm x 228 mm	6465.00 g	17.97 dm <sup>3</sup>

The mentioned product code describes the smallest quantity unit which can be ordered. One shipping unit can contain one or more single products. When placing an order, for the quantity please enter single or multiples of a shipping unit.

### ADDITIONAL CATALOG INFORMATION

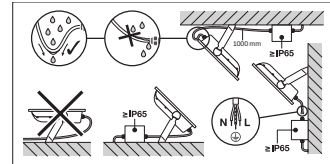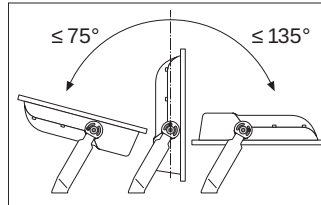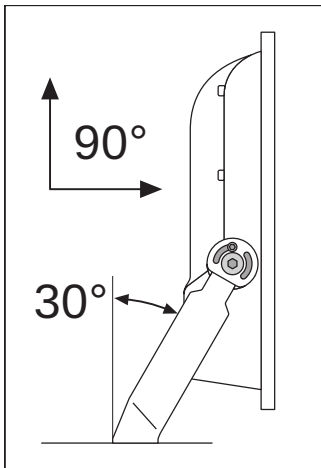

### References / Links

– For Guarantee see [www.ledvance.com/guarantee](http://www.ledvance.com/guarantee)

### DISCLAIMER

Subject to change without notice. Errors and omission excepted. Always make sure to use the most recent release.