

RJ45 FTP plug Cat6a for AWG22-23 solid/stranded conductor

Item no.: LVN125417



PRODUCT OVERVIEW

RJ45 plug used for direct mounting on cable with large AWG size for example Cat6a. Often used with installation of IP cameras. Suitable for both unshielded and shielded installations

SPECIFICATIONS

RJ45 plug FTP	
8P8C	
AWG 22-23	
ба	
500 MHz	
1 piece	
ISO/IEC 11801,Category 6 A ANSI/TIA-568-C.2, Category 6A	

PHYSICAL

Housing	Zinc-alloy fully shielded	
Contact pin	Phosphor Bronze Alloy Plated With 50 micro-inch of Gold	
IDC	Phosphor Bronze Alloy With 100 micro-inch 100% Sn Alloy	


ELECTRICAL

Electrical Insulation Resistance	SOOMO min. @100V d.c	
Dielectric Withstanding Voltage	1000V D.C or A.C Peak, Contact to Contact; 1500V D.C or A.C Peak, Contact to Shield @ 60Hz for 1 Minute	



Version 1.0 2021, March 11



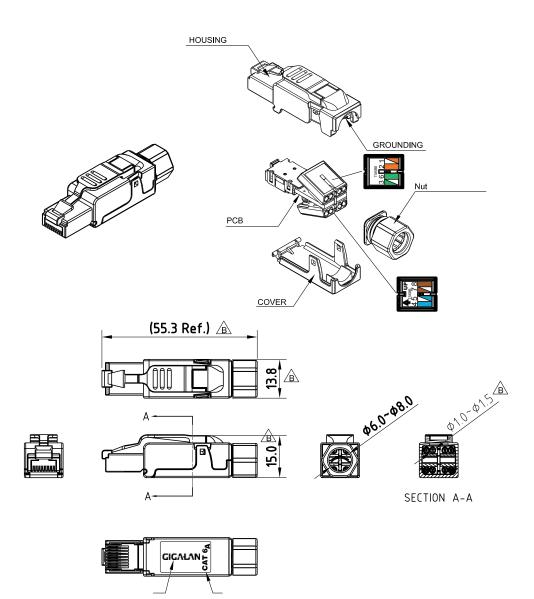

ITEM	PART NAME	MATERIAL	QUANTITY
1	HOUSING Moudle	Zinc-alloy	1
2	COVER	Zinc-alloy	1
3	GROUNDING	SUS304 CSP-1/2H	1
4	PCB Moudle	-	1
5	Nut	NYLON 94V-0	1
6	Wiring Lable-UP	Lable	1
7	Wiring Lable-DOWN	Lable	1

RJ45 FTP plug Cat6a for AWG22-23 solid/stranded conductor