Philips 32BDL3511Q/00 infonäyttö Digitaalinen A-taulu 81,3 cm (32") 350 cd/m² Full HD musta 18/7
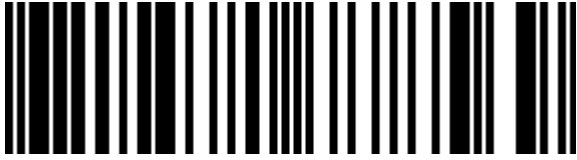
Tuotemerkki : Philips

Tuotteen nimi : 32BDL3511Q/00

Tuotekoodi: 32BDL3511Q/00

Philips 32BDL3511Q/00. Tuotteen muotoilu: Digitaalinen A-taulu. Näytön halkaisija: 81,3 cm (32"), Näytön erottelutarkkuus: 1920 x 1080 pikseliä, Näytön kirkkaus: 350 cd/m², HD-tyyppi: Full HD. Toiminta-aika (tunteja/päiviä): 18/7. Tuotteen väri: musta

Display

Panel type	VA
LED backlighting type	Direct-LED
Display diagonal *	81.3 cm (32")
Display resolution *	1920 x 1080 pixels
Display brightness *	350 cd/m²
HD type *	Full HD
Touchscreen *	✗
Native aspect ratio	16:9
Response time	6.5 ms
Contrast ratio (typical)	4000:1
Contrast ratio (dynamic)	500000:1
Viewing angle, horizontal	178°
Viewing angle, vertical	178°
Display number of colours	16.78 million colours
Pixel pitch	0.36375 x 0.36375 mm
Display diagonal (metric)	80 cm
Panel life	50000 h
Haze rate	2%

Ports & interfaces

HDMI ports quantity *	2
HDMI version	2.0
HDMI input ports quantity	2
DVI port *	✔
DVI-I ports quantity	1
USB port *	✔
USB ports quantity	2
USB version	2.0
Ethernet LAN *	✔
Ethernet LAN (RJ-45) ports	1
Audio (L/R) in	1
Audio (L/R) out	1
RS-232C	✔
Remote (IR) input	1
Remote (IR) output	1

Audio

Built-in speaker(s) *	✔
Number of built-in speakers	2
RMS rated power	20 W

Design

Product design *	Digital A-board
Placement supported *	Indoor

Design

Orientation	Horizontal/Vertical
Product colour *	Black
VESA mounting *	✔
Panel mounting interface	100 x 100,200 x 200 mm
Bezel width (bottom)	1.72 cm
Bezel width (side)	1.19 cm
Bezel width (top)	1.19 cm

Performance

Purpose *	Commercial
Operating hours (hours/days)	18/7

Power

Power consumption (typical) *	45 W
Power consumption (standby) *	0.5 W
Energy efficiency class (SDR)	G
Energy consumption (SDR) per 1000 hours	41 kWh
AC input voltage	100 - 240 V
AC input frequency	50 - 60 Hz
Energy efficiency scale	A to G

Computer system

Video formats supported	H.264, MPEG, WMV3
Audio formats supported	AAC, HE-AAC, WMA
Image formats supported	BMP, JPEG, PNG

Weight & dimensions

Display width	726.5 mm
Display depth	69.1 mm
Display height	425.4 mm
Display weight	5.7 kg

Packaging content

Remote control included	✔
Batteries included	✔
Cables included	AC, IR sensor, RS-232, USB

Operational conditions

Operating temperature (T-T)	0 - 40 °C
Operating relative humidity (H-H)	20 - 80%
Storage temperature (T-T)	-20 - 60 °C
Storage relative humidity (H-H)	5 - 95%

Logistics data

Harmonized System (HS) code	85285210

8712581778569